




EXTERNAL ACCESS SYSTEM

HARKEN®

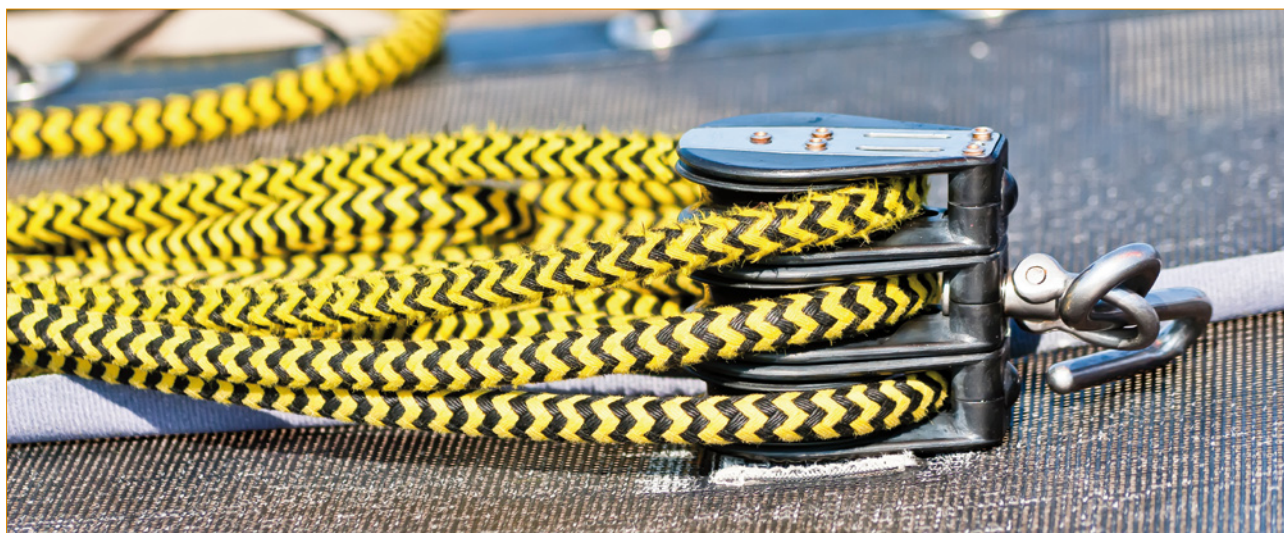

1643.CLEAR



HC9606.CLEAR



HC9561.CLEAR

Car Assembly

Code	Description	Length		Width		Maximum working load		Fits track
		in	mm	in	mm	lb	kg	
MM HRK HC9606.CLEAR*	27 mm Midrange 2-car External Access car assembly with coupler	10 ³ / ₄	273	2 ³ / ₄	70	220	100	1643/1644

External access cars must only be used with high-load track and endstops listed below. 5/16" (8 mm) track fasteners required.

*To order black Hardkote-anodized, remove ".CLEAR" from end of part number

Track

Code	Description	Length		Mounting hole spacing		Fasteners		Endstop	Splice link
		ft/in	m	in	mm	in	mm		
MM HRK 1643.3m.CLEAR*	27 mm Midrange high-load pinstop track	9'10 ¹ / ₁₆ "	3	3 ¹⁵ / ₁₆	100	5/ ₁₆ FH	8 FH	HC9561.CLEAR*	1619
MM HRK 1643.3.6m.CLEAR*	27 mm Midrange high-load pinstop track	11'9 ³ / ₄ "	3.6	3 ¹⁵ / ₁₆	100	5/ ₁₆ FH	8 FH	HC9561.CLEAR*	1619
MM HRK 1643.6m.CLEAR*	27 mm Midrange high-load pinstop track	19'8 ¹ / ₄ "	6	3 ¹⁵ / ₁₆	100	5/ ₁₆ FH	8 FH	HC9561.CLEAR*	1619
MM HRK HC9561.CLEAR*	27 mm Midrange track endstops (sold in pairs)	2 ¹ / ₄ "	57 mm	---	---	5/ ₁₆ FH	8 FH	---	---
MM HRK 1619	Splice link	Purchase one splice link for each track section.							

1644 Track for 6 mm fasteners with 50 mm hole spacing available by special order. Contact Harken for lead time.

*To order black Hardkote-anodized, remove ".CLEAR" from end of part number

MIDRANGE

HARKEN®1540
1542
1586

1541



1544



1545



1546



1548



1559



1560



1564

Code	Description	Sheave Ø		Length		Weight		Max line Ø		Shackle pin Ø		Maximum working load		Breaking load		Use with
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
MM HRK 1540	Single	3	76	6 1/8	156	13	367	9/16	14	5/16	8	1800	816	5000	2268	
MM HRK 1542	Single/aluminum sheave	3	76	6 1/8	156	15	425	9/16	14	5/16	8	1800	816	5000	2268	
MM HRK 1586	Single/high-load	3	76	6 1/8	156	13	367	9/16	14	5/16	8	2300	1043	5000	2268	
MM HRK 1541	Single/becket	3	76	7 1/8	184	14	397	9/16	14	5/16	8	1800	816	5000	2268	
MM HRK 1544	Double	3	76	7 1/2	191	25 1/2	723	9/16	14	5/16	8	2800	1270	7000	3175	
MM HRK 1545	Double/becket	3	76	8 1/2	216	26 1/2	751	9/16	14	5/16	8	2800	1270	7000	3175	
MM HRK 1546	Triple	3	76	7 3/4	197	36	1020	9/16	14	5/16	8	3800	1724	8500	3856	
MM HRK 1548	Cheek*	3	76	4 3/8	111	11	312	9/16	14	---	---	1500	680	4200	1905	
MM HRK 1559	Fiddle	3/2	76/51	8 1/2	216	17	482	9/16	14	5/16	8	1800	816	5000	2268	1541 for 3:1
MM HRK 1560	Fiddle/becket	3/2	76/51	9 1/2	241	18	510	9/16	14	5/16	8	1800	816	5000	2268	1559 for 4:1
MM HRK 1564	Fiddle/280 Cam-Matic®/becket	3/2	76/51	9 1/2	241	24 1/2	695	9/16	14	5/16	8	1800	816	5000	2268	1559 for 4:1

*1/4" (6 mm) RH fasteners

BIG BOAT BLOCKS

HARKEN®**BLACK MAGIC AIRBLOCKS 57 MM****1951
1959****1950
1958****1952
1960****1961****1954****1965****3195**

Code	Description	Sheave Ø mm	Length		Weight w/shackle		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
			in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
MM HRK 1950	Single/swivel/low-load	57	4 ¹¹ / ₁₆	119	5.0	142	1/4	6	7/16	12	1655	750	3310	1500
MM HRK 1951	Single/swivel/low-load/ becket	57	5 1/2	140	5.5	155	1/4	6	7/16	12	1655	750	3310	1500
MM HRK 1952	Double/swivel/low-load	57	5 ³ / ₁₆	132	10.1	286	5/16	8	7/16	12	2755	1250	5510	2500
MM HRK 1954	Triple/swivel	57	5 ³ / ₁₆	132	13.2	375	5/16	8	7/16	12	4850	2200	9700	4400
MM HRK 1958	Single/swivel/high-load	57	4 ¹¹ / ₁₆	119	5.0	142	1/4	6	7/16	12	2500	1134	5000	2268
MM HRK 1959	Single/swivel/high-load/ becket	57	5 1/2	140	5.5	155	1/4	6	7/16	12	2500	1134	5000	2268
MM HRK 1960	Double/swivel/high-load	57	5 ³ / ₁₆	132	10.1	286	5/16	8	7/16	12	3600	1633	7200	3267
MM HRK 1961	Double/swivel/high-load/ becket	57	6	152	10.6	302	5/16	8	7/16	12	3600	1633	7200	3267
MM HRK 1965	Stand-up/high-load*	57	4 1/2	114	7.4	210	1/4	6	7/16	12	2500	1134	5000	2268
MM HRK 3195	Single loop block**	57	3	76	3.25	92	---	---	7/16	12	2500	1134	5000	2268

*Includes padeye

1/4" (6 mm) fastener circle: 1¹⁵/₃₂" (37 mm)

**Loop not included

HARKEN®**BLACK MAGIC AIRBLOCKS 75 MM****1969
3090****1970****1971****3095****3196****1974****3088****1975****1962**

Code	Description	Sheave Ø mm	Length		Weight w/shackle		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
			in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
MM HRK 1962	Spriddle/becket	75/57	8 ⁷ / ₈	225	16.8	476	5/16	8	9/16	14	5000	2268	10000	4536
MM HRK 1969	Single/swivel	75	5 ¹ / ₈	129	11.5	325	5/16	8	9/16	14	5000	2268	10000	4536
MM HRK 1970	Single/swivel/becket	75	6 ³ / ₁₆	157	12.4	351	5/16	8	9/16	14	5000	2268	10000	4536
MM HRK 1971	Double/swivel	75	5 1/4	134	25.7	728	3/8	10	9/16	14	7500	3402	15000	6804
MM HRK 1974	Stand-up*	75	5 ¹⁵ / ₁₆	151	15.5	440	---	---	9/16	14	5000	2268	10000	4536
MM HRK 1975	Spriddle	75/57	7 ¹³ / ₁₆	199	15.9	452	5/16	8	9/16	14	5000	2268	10000	4536
MM HRK 3088	Straphead spriddle	75/57	7 ³ / ₃₂	180	12.8	362	---	---	9/16	14	5000	2268	10000	4536
MM HRK 3090	Single/swivel/low-load	75	5 ¹ / ₈	129	11.5	325	5/16	8	9/16	14	3000	1361	6000	2722
MM HRK 3095	Double/straphead	75	4 ¹¹ / ₁₆	119	19.2	545	---	---	9/16	14	7500	3402	15000	6804
MM HRK 3196	Single Loop block**	75	3 ¹⁵ / ₁₆	100	7.27**	206	---	---	9/16	14	5000	2268	10000	4536

*Includes padeye. Uses hole spacing and base dimensions of 627 padeye. Maximum working load decreases at varying angles.

**Loop not included

HARKEN®**BLACK MAGIC AIRBLOCKS 100 MM****3012****C8213****3199****3089****1993****3007****3008****3009**

Code	Description	Sheave Ø mm	Length		Weight w/shackle		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
			in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
MM HRK 1993	Spriddle	100/75	11 ¹¹ / ₁₆	297	26.5	752	3/8	10	5/8	16	7500	3402	15000	6804
MM HRK 3007	Single/swivel	100	8	203	20.1	570	3/8	10	5/8	16	7500	3402	15000	6804
MM HRK 3008	Single/swivel/becket	100	9 ¹ / ₂	241	22.6	641	3/8	10	5/8	16	7500	3402	15000	6804
MM HRK 3009	Double/swivel	100	8 ⁵ / ₁₆	227	48.3	1370	1/2	12	5/8	16	11000	4990	22000	9979
MM HRK 3012	Stand-up*	100	7 ¹¹ / ₁₆	195	30.3	859	---	---	5/8	16	7500	3402	15000	6804
MM HRK 3089	Straphead spriddle	100/75	9 ¹ / ₄	235	24	680	---	---	5/8	16	7500	3402	15000	6804
MM HRK 3199	Single Loop block**	100	5 ¹ / ₁₆	128	13.06	370	---	---	5/8	16	7500	3402	15000	6804
MM HRK C8213	Center becket for 100 mm	100	1.83	46.5	2.4	67	---	---	---	---	2500	1134	---	---

*Includes padeye. Uses hole spacing and base dimensions of 648 padeye.

**Loop not included

HARKEN®**BLACK MAGIC AIRBLOCKS 125-150 MM****3201****C7971
C7592****3016
3021****3018
3022**

Code	Description	Sheave Ø mm	Length		Weight w/shackle		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
			in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
125 mm														
MM HRK 3016	Single/swivel	125	10	254	36.8	1042	1/2	12	3/4	19	11000	4990	22000	9977
MM HRK 3018	Stand-up*	125	9 ¹ / ₁₆	230	43.9	1246	---	---	3/4	19	11000	4990	22000	9977
MM HRK 3201	Single Loop block***	125	6	163	23.20***	658***	---	---	3/4	19	11000	4990	22000	9977
MM HRK C7971	Center becket for 125 mm	---	2 ³ / ₈	60	4.9	140	---	---	---	---	3667	1663	---	---
150 mm														
MM HRK 3021	Single/swivel	150	12	305	61	1730	5/8	16	1	25	15000	6802	30000	13605
MM HRK 3022	Stand-up**	150	11 ¹ / ₈	283	66	1878	---	---	1	25	15000	6802	30000	13605
MM HRK C7592	Center becket for 150 mm	---	2 ³ / ₄	71	9.4	270	---	---	---	---	5000	2268	---	---

*Includes padeye. Uses hole spacing and base dimensions of 648 padeye. Maximum working load decreases at varying angles.

**Uses hole spacing and base dimensions of 629 padeye. Maximum working load decreases at varying angles.

***Loop not included

HARKEN®**BLACK MAGIC TEARDROP**3042
3046

3044

3047
3050

Code	Description	Sheave Ø		Clevis pin Ø		Length		Weight		Max Line Ø		Maximum working load		Breaking load		Use padeye
		in	mm	in	mm	in	mm	oz	g	in	mm	lb	kg	lb	kg	
57 mm																
MM HRK 3042	Mastcollar/low-load	2 ¹ / ₄	57	---	6	3 ³ / ₈	86	3.6	102	³ / ₈	10	1655	750	3310	1500	---
MM HRK 3044	Padeye/high-load	2 ¹ / ₄	57	⁵ / ₁₆	8	3 ³ / ₈	86	3.9	110	³ / ₈	10	2500	1134	5000	2268	627
75 mm																
MM HRK 3046	Mastcollar/low-load	3	75	⁵ / ₁₆	8	4 ⁷ / ₁₆	113	8.5	240	⁹ / ₁₆	14	3000	1361	6000	2721	---
MM HRK 3047	Padeye	3	75	³ / ₈	10	4 ⁷ / ₁₆	113	9	250	⁹ / ₁₆	14	5000	2268	10000	4535	648/689
100 mm																
MM HRK 3050	Padeye	4	100	¹ / ₂	12.7	5 ¹³ / ₁₆	148	15.3	436	⁵ / ₈	16	7500	3402	15000	6804	---

HARKEN®**CROSSOVER**

1984
1981

Code	Description	Sheave Ø		Base Ø		Height		Max Line Ø		Weight		Maximum working load		Breaking load	
		in	mm	in	mm	in	mm	in	mm	oz	g	lb	kg	lb	kg
MM HRK 1981	Crossover block	2 ³ / ₁₆	56	2 ⁵ / ₈	66	1 ⁷ / ₁₆	36	7 ¹ / ₁₆	12	8	227	3000	1361	6000	2721
MM HRK 1984	Crossover block	1 ³ / ₄	44	2 ¹ / ₁₆	52	1 ¹ / ₄	32	3 ³ / ₈	10	4.2	119	2000	907	4000	1814

Fastener included

HARKEN®**FOOTBLOCKS**

1963
1972
3010
3017
3023



1964
1973
3011
3033



1967
3005



1968
3006

Code	Description	Sheave Ø		Length		Height		Weight		Max Line Ø		Maximum working load		Breaking load		Fasteners (FH)	
		in	mm	in	mm	in	mm	oz	g	in	mm	lb	kg	lb	kg	in	mm
57 mm																	
MM HRK 1963	Single/high-load	2 ¹ / ₄	57	3 ⁵ / ₁₆	84	1	25	4.2	119	⁷ / ₁₆	12	2500	1134	5000	2268	4 x ¹ / ₄	4 x 6
MM HRK 1964	Double/high-load	2 ¹ / ₄	57	3 ⁵ / ₁₆	84	1 ¹³ / ₁₆	46	6.9	195	⁷ / ₁₆	12	1650	750	3300	1500	4 x ¹ / ₄	4 x 6
MM HRK 1967	Single/high-load/lockoff*	2 ¹ / ₄	57	3 ⁵ / ₁₆	84	1	25	5.3	150	⁷ / ₁₆	12	2500	1134	5000	2268	4 x ¹ / ₄	4 x 6
MM HRK 1968	Double/high-load/lockoff*	2 ¹ / ₄	57	3 ⁵ / ₁₆	84	1 ¹³ / ₁₆	46	9.6	272	⁷ / ₁₆	12	1650	750	3300	1500	4 x ¹ / ₄	4 x 6
75 mm																	
MM HRK 1972	Single	3	75	4 ³ / ₈	111	1 ¹ / ₄	32	10.2	288	⁹ / ₁₆	14	5250	2380	10500	4762	4 x ⁵ / ₁₆	4 x 8
MM HRK 1973	Double	3	75	4 ³ / ₈	111	2 ¹ / ₄	57	18	508	⁹ / ₁₆	14	3465	1572	6930	3143	4 x ⁵ / ₁₆	4 x 8
MM HRK 3005	Single/lockoff*	3	75	4 ³ / ₈	111	1 ¹ / ₄	32	11.7	333	⁹ / ₁₆	14	5250	2380	10500	4762	4 x ⁵ / ₁₆	4 x 8
MM HRK 3006	Double/lockoff*	3	75	4 ³ / ₈	111	2 ¹ / ₄	57	20.7	586	⁹ / ₁₆	14	3465	1572	6930	3143	4 x ⁵ / ₁₆	4 x 8
100 mm																	
MM HRK 3010	Single	4	100	5 ⁵ / ₈	143	1 ⁵ / ₁₆	33	20.6	584	⁵ / ₈	16	7500	3402	15000	6803	4 x ³ / ₈	4 x 10
MM HRK 3011	Double	4	100	5 ⁵ / ₈	143	2 ⁷ / ₁₆	62	36.2	1025	⁵ / ₈	16	4950	2250	9900	4500	4 x ³ / ₈	4 x 10
125 mm																	
MM HRK 3017	Single	5	125	6 ¹⁵ / ₁₆	176	1 ¹¹ / ₁₆	43	35.7	1012	³ / ₄	19	11000	4990	22000	9977	4 x ¹ / ₂	4 x 12
MM HRK 3033	Double	5	125	6 ¹⁵ / ₁₆	176	2 ¹³ / ₁₆	71.5	62.2	1762	³ / ₄	19	7260	3292	14520	6585	4 x ¹ / ₂	4 x 12
150 mm																	
MM HRK 3023	Single	6	150	8 ¹ / ₁₆	205	1 ⁷ / ₈	48	60.6	1719	1	25	15000	6818	30000	13636	4 x ⁵ / ₈	4 x 16

*Lockoffs are intended to hold lines temporarily and should not be used in place of line stoppers or clutches

HARKEN®**BLACK MAGIC AIR RUNNERS**

1991
3013
3019
3024



1992
3014
3020
3025



3035
3036
3037
3038



3026



3028



3048
3051
3030



3052
3031
3027

BIG BOAT BLOCKS

RUNNER BLOCKS

Code	Description	Sheave Ø		Length		Weight		Clevis pin Ø		Max Line Ø		Maximum working load		Breaking load	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
57 mm															
MM HRK 3039	Single	2 1/4	57	3 3/8	86	4.4	124	3/8	10	1 1/2	12	2500	1134	5000	2268
75 mm															
MM HRK 1991	Single	3	75	4 5/8	118	9.3	264	1/2	12.7	9/16	14	5000	2268	10000	4544
MM HRK 1992	Single/becket	3	75	5 3/4	146	10.3	293	1/2	12.7	9/16	14	5000	2268	10000	4544
100 mm															
MM HRK 3013	Single	4	100	6 3/16	157	17.5	495	5/8	15.9	5/8	16	7500	3402	15000	6802
MM HRK 3014	Single/becket	4	100	7 9/16	193	19.4	550	5/8	15.9	5/8	16	7500	3402	15000	6802
125 mm															
MM HRK 3019	Single	5	125	7 11/16	195	29.0	824	3/4	19	3/4	19	11000	4990	22000	9980
MM HRK 3020	Single/becket	5	125	9 1/2	240	32.6	922	3/4	19	3/4	19	11000	4990	22000	9980
150 mm															
MM HRK 3024	Single	6	150	8 3/4	221	49.4	1400	3/4	19	1	25	15000	6802	30000	13605
MM HRK 3025	Single/becket	6	150	10 13/16	275	55.2	1566	3/4	19	1	25	15000	6802	30000	13605

HEADS

Perpendicular Part No.	Parallel Part No.	Weight	
		oz	g
MM HRK 3048	MM HRK 3048	3.8	108
MM HRK 3051	MM HRK 3051	7.4	210
MM HRK 3030	MM HRK 3030	13.8	381
MM HRK 3028*	MM HRK 3026*	19	537

TANGS

Tang Part No.	Weight		Runner pin Ø		Checkstay pin Ø	
	oz	g	in	mm	in	mm
MM HRK 3052	5.5	156	1/2	12.7	3/8	10
MM HRK 3031	9	255	3/4	19	7/16	11.1
MM HRK 3027*	11	310	3/4	19	1/2	12.7

BLOCK SOCKS

Block Socks Part No.	Fits
MM HRK 3035	1991/1992
MM HRK 3036	3013/3014
MM HRK 3037	3019/3020
MM HRK 3038	3024/3025

*150 mm Runner post and tang adapters made to order

HARKEN®**CRUISING ESP**

6059
6058
6100



6094
6084



6085



6086



6099

**NEW**

6105

Code	Description	Sheave Ø		Length		Weight		Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg
57 mm															
MM HRK 6059	Single/swivel	2 1/4	57	5 1/2	140	7.7	218	5/16	8	5/8	16	2205	1000	4409	2000
MM HRK 6094	Single/swivel/becket	2 1/4	57	6 11/16	170	9	255	5/16	8	5/8	16	2205	1000	4409	2000
MM HRK 6105	Forkhead	2 1/4	57	4 1/2	114	4.5	129	1/4	6	3/8	10	1650	748	3300	1496
75 mm															
MM HRK 6058	Single/swivel	3	75	6 1/4	159	12	340	5/16	8	3/4	19	3500	1587	7000	3175
MM HRK 6084	Single/swivel/becket	3	75	7 1/4	184	13	369	5/16	8	3/4	19	3500	1587	7000	3175
MM HRK 6085	Fiddle	3/1 13/16	75/46	8 3/8	213	14.7	415	5/16	8	3/4	19	3500	1587	7000	3175
MM HRK 6086	Fiddle/becket	3/1 13/16	75/46	9 1/2	241	15.6	444	5/16	8	3/4	19	3500	1587	7000	3175
MM HRK 6099	Fiddle/becket/280 Cam-Matic®	3/1 13/16	75/46	9 1/2	241	25.2	715	5/16	8	3/4	19	2000	907	4000	1814
100 mm															
MM HRK 6100	Single/swivel	4	100	8 7/8	206	28.5	808	3/8	10	3/4	19	4870	2209	9740	4418

HARKEN®**CRUISING ESP****NEW**

6077
6078




6091
6092
6093



6106



6050
6056
6095



14 mm
(6050, 6056)



6065
6057




6096
6097
6098

BIG BOAT BLOCKS

Code	Description	Sheave Ø		Length		Weight		Clevis pin Ø		Max Line Ø		Maximum working load		Breaking load		Max lockoff load		Fasteners (FH)	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	lb	kg	in	mm
40 mm																			
MM HRK 6106	Teardrop Footblock‡	1 ⁹ / ₁₆	40	2 ¹⁹ / ₃₂	65.5	1.8	50	—	—	1 ¹ / ₂	12	1250	567	2500	907	—	—	5 ¹ / ₁₆ , 5 ¹ / ₃₂	8,4
57 mm																			
MM HRK 6050	Teardrop Mastcollar	2 ¹ / ₄	57	3 ¹¹ / ₁₆	93.5	4.3	122	5 ¹ / ₁₆	8	5 ¹ / ₈	16	2100	850	4190	1900	—	—	—	—
MM HRK 6065	Teardrop Padeye block	2 ¹ / ₄	57	3 ¹¹ / ₁₆	93.5	4.5	128	5 ¹ / ₁₆	8	5 ¹ / ₈	16	2100	850	4190	1900	—	—	—	—
MM HRK 6077	Footblock/lockoff**‡	2 ¹ / ₄	57	3 ⁷ / ₈	99	8	226	—	—	5 ¹ / ₈	16	2205	1000	4409	2000	1200	550	5 ¹ / ₁₆	8
MM HRK 6091	Footblock‡	2 ¹ / ₄	57	3 ⁷ / ₈	99	5.4	153	—	—	5 ¹ / ₈	16	2205	1000	4409	2000	—	—	5 ¹ / ₁₆	8
MM HRK 6095	Teardrop Mastcollar/low-load	2 ¹ / ₄	57	4 ⁵ / ₈	117	4	113	—	6	5 ¹ / ₈	16	1650	750	3300	1500	—	—	—	—
MM HRK 6096	Narrow Teardrop Mastcollar	2 ¹ / ₄	57	3 ¹ / ₂	89	3.3	94	—	6	3 ¹ / ₈	10	1650	748	3300	1497	—	—	—	—
MM HRK 6097	Narrow Teardrop Mastcollar	2 ¹ / ₄	57	3 ¹ / ₂	89	3.5	99	5 ¹ / ₁₆	8	3 ¹ / ₈	10	1650	748	3300	1497	—	—	—	—
75 mm																			
MM HRK 6056	Teardrop Mastcollar	3	75	4 ⁵ / ₈	117	7.8	221	5 ¹ / ₁₆	8	3 ¹ / ₄	19	3000	1361	6000	2721	—	—	—	—
MM HRK 6057	Teardrop Padeye Block	3	75	4 ¹¹ / ₁₆	119	8.4	238	3 ¹ / ₈	10	3 ¹ / ₄	19	3500	1587	7000	3175	—	—	—	—
MM HRK 6078	Foot/lockoff**‡	3	75	4 ³ / ₈	112	12	340	—	—	3 ¹ / ₄	19	3500	1587	7000	3175	1200	550	5 ¹ / ₁₆	8
MM HRK 6092	Footblock‡	3	75	4 ³ / ₈	112	10.3	293	—	—	3 ¹ / ₄	19	3500	1587	7000	3175	—	—	5 ¹ / ₁₆	8
MM HRK 6098	Narrow Teardrop Mastcollar	3	75	4 ⁷ / ₁₆	113	6.4	181	5 ¹ / ₁₆	8	1 ¹ / ₂	12	2500	1134	5000	2268	—	—	—	—
100 mm																			
MM HRK 6093	Footblock‡	4	100	5 ¹¹ / ₁₆	144	22.6	642	—	—	3 ¹ / ₄	19	7500	3402	15000	6804	—	—	1 ¹ / ₂	12

**Lockoffs are intended to hold lines temporarily and should not be used in place of line stoppers or clutches

‡If double stacked, upper block is two-thirds of listed MWL and breaking load

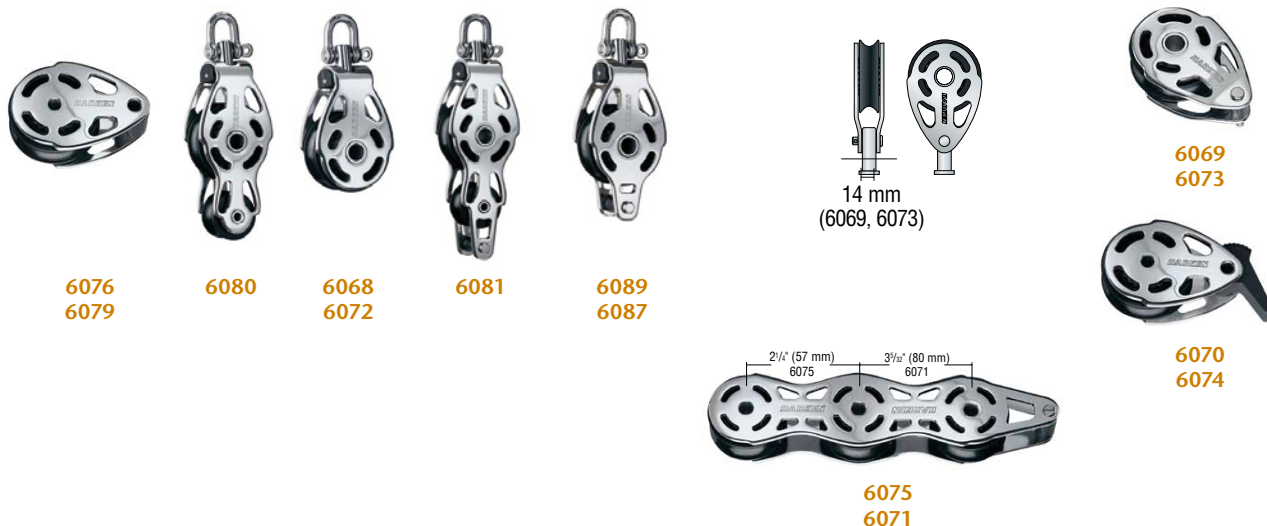HARKEN®**STAINLESS STEEL CRUISING ESP**

Code	Description	Sheave Ø		Length		Weight		Clevis/ Shackle pin Ø		Max Line Ø		Maximum working load		Breaking load ‡		Max lockoff load		Fasteners (FH)	
		in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	lb	kg	in	mm
57 mm																			
MM HRK 6068	Single/swivel	2 ¹ / ₄	57	5 ¹ / ₂	140	11	312	⁵ / ₁₆	8	⁵ / ₈	16	2205	1000	4409	2000	—	—	—	—
MM HRK 6069	Mastcollar	2 ¹ / ₄	57	3 ¹¹ / ₁₆	93.5	7	198	⁵ / ₁₆	8	⁵ / ₈	16	2205	1000	4409	2000	—	—	—	—
MM HRK 6070	Single foot/lockoff*‡	2 ¹ / ₄	57	3 ³ / ₄	132	9	255	—	—	⁵ / ₈	16	2205	1000	4409	2000	650	295	³ / ₈	10
MM HRK 6076	Footblock‡	2 ¹ / ₄	57	3 ³ / ₄	95	7	198	—	—	⁵ / ₈	16	2205	1000	4409	2000	—	—	³ / ₈	10
MM HRK 6089	Single/swivel/becket	2 ¹ / ₄	57	6 ¹¹ / ₁₆	170	12.5	354	⁵ / ₁₆	8	⁵ / ₈	16	2205	1000	4409	2000	—	—	—	—
75 mm																			
MM HRK 6072	Single/swivel	3	75	6 ¹ / ₄	159	19	539	⁵ / ₁₆	8	³ / ₄	19	3500	1587	7000	3175	—	—	—	—
MM HRK 6073	Mastcollar	3	75	4 ⁵ / ₈	117	16	454	⁵ / ₁₆	8	³ / ₄	19	3000	1361	6000	2721	—	—	—	—
MM HRK 6074	Single foot/lockoff*‡	3	75	4 ³ / ₈	111	17	482	—	—	³ / ₄	19	3500	1587	7000	3175	750	340	³ / ₈	10
MM HRK 6079	Footblock‡	3	75	4 ¹ / ₂	114	16	454	—	—	³ / ₄	19	3500	1587	7000	3175	—	—	³ / ₈	10
MM HRK 6080	Fiddle	3/1 ¹³ / ₁₆	75/46	8 ³ / ₈	213	24	680	⁵ / ₁₆	8	³ / ₄	19	3500	1587	7000	3175	—	—	—	—
MM HRK 6081	Fiddle/becket	3/1 ¹³ / ₁₆	75/46	9 ¹ / ₂	241	26.25	744	⁵ / ₁₆	8	³ / ₄	19	3500	1587	7000	3175	—	—	—	—
MM HRK 6087	Single/swivel/becket	3	75	7 ¹ / ₄	184	21.25	602	⁵ / ₁₆	8	³ / ₄	19	3500	1587	7000	3175	—	—	—	—
Deck Organizers																			
MM HRK 6075	Deck organizer/3-sheave‡	1 ¹ / ₂	40	7 ¹¹ / ₁₆	179	10	284	—	—	¹ / ₂	12	3000	1361	6000	2721	—	—	⁵ / ₁₆	8
MM HRK 6071	Deck organizer/3-sheave‡	2 ¹ / ₄	57	9 ¹⁵ / ₁₆	252	21	595	—	—	⁵ / ₈	16	6000	2721	12000	5442	—	—	³ / ₈	10

*Lockoffs are intended to hold lines temporarily and should not be used in place of line stoppers or clutches

‡If double stacked, upper block/organizer is two-thirds of listed MWL and breaking load

HARKEN®**STAINLESS STEEL BLOCKS**

HC9077
HC9082
HC9087
HC9092



HC9078
HC9083
HC9088
HC9093



HC9076
HC9081
HC9086
HC9091
HC10102 **NEW**



HC9080
HC9085
HC9090
HC9095



HC9079
HC9084
HC9089
HC9094



HC9985
NEW



HC9986
NEW



HC9987
NEW



HC9990
NEW



HC10041
NEW

BIG BOAT BLOCKS

Code	Description	Sheave Ø		Max Line Ø		Maximum working load		Breaking load	
		in	mm	in	mm	lb	kg	lb	kg
75 mm									
MM HRK HC9985	Swivel block	3	75	$\frac{9}{16}$	14	5000	2268	10000	4536
MM HRK HC9986	Stand-up block	3	75	$\frac{9}{16}$	14	5000	2268	10000	4536
MM HRK HC9987	Swivel block/becket	3	75	$\frac{9}{16}$	14	5000	2268	10000	4536
MM HRK HC9990	Teardrop	3	75	$\frac{9}{16}$	14	5000	2268	10000	4536
MM HRK HC10041	Single footblock	3	75	$\frac{9}{16}$	14	5250	2382	10500	4763
100 mm									
MM HRK HC9076	Stand-up block	3.94	100	$\frac{5}{8}$	16	11025	5000	22050	10000
MM HRK HC9077	Swivel block	3.94	100	$\frac{5}{8}$	16	11025	5000	22050	10000
MM HRK HC9078	Teardrop	3.94	100	$\frac{5}{8}$	16	11025	5000	22050	10000
MM HRK HC9080	Single footblock	3.94	100	$\frac{5}{8}$	16	11025	5000	22050	10000
MM HRK HC9079	Double footblock	3.94	100	$\frac{5}{8}$	16	7350	3333	14699	6666
125 mm									
MM HRK HC9081	Stand-up block	4.92	125	$\frac{3}{4}$	19	15435	7000	30870	14000
MM HRK HC9082	Swivel block	4.92	125	$\frac{3}{4}$	19	15435	7000	30870	14000
MM HRK HC9083	Teardrop	4.92	125	$\frac{3}{4}$	19	15435	7000	30870	14000
MM HRK HC9085	Single footblock	4.92	125	$\frac{3}{4}$	19	15435	7000	30870	14000
MM HRK HC9084	Double footblock	4.92	125	$\frac{3}{4}$	19	10187	4620	20374	9240
150 mm									
MM HRK HC9086	Stand-up block	5.91	150	1	25	22050	10000	44100	20000
MM HRK HC9087	Swivel block	5.91	150	1	25	22050	10000	44100	20000
MM HRK HC9088	Teardrop	5.91	150	1	25	22050	10000	44100	20000
MM HRK HC9090	Single footblock	5.91	150	1	25	22050	10000	44100	20000
MM HRK HC9089	Double footblock	5.91	150	1	25	14699	6666	29398	13332
MM HRK HC10102	Stand-up block/U-bolt	5.91	150	1	25	22050	10000	44100	20000
175 mm									
MM HRK HC9091	Stand-up block	6.89	175	1	25	33075	15000	66150	30000
MM HRK HC9092	Swivel block	6.89	175	1	25	33075	15000	66150	30000
MM HRK HC9093	Teardrop	6.89	175	1	25	33075	15000	66150	30000
MM HRK HC9095	Single footblock	6.89	175	1	25	33075	15000	66150	30000
MM HRK HC9094	Double footblock	6.89	175	1	25	22050	10000	44100	20000

HARKEN®**BALL BEARING CAM CLEATS**

Code	Description	Height		Length		Width		Weight		Line Ø min - max		Fastener spacing		Maximum working load		Breaking load		Pawls
		in	mm	in	mm	in	mm	oz	g	in	mm	in	mm	lb	kg	lb	kg	
MM HRK 150	Cam-Matic®*	1 ³ / ₁₆	30	2 ⁹ / ₁₆	65	1 ¹ / ₄	32	2.50	71	1 ¹ / ₈ - 1 ¹ / ₂	3 - 12	1 ¹ / ₂	38	300	136	750	340	Aluminum
MM HRK 280	Offshore Cam-Matic®***	1 ¹ / ₄	32	3 ³ / ₈	85	1 ¹ / ₂	38	5.25	148	1 ¹ / ₄ - 5 ⁵ / ₈	6 - 16	2 ¹ / ₁₆	52	500	227	1000	454	Aluminum
MM HRK 468	Micro Cam-Matic®**	7 ⁷ / ₈	22	1 ⁷ / ₈	48	1 ⁵ / ₁₆	24	0.93	26	3 ³ / ₃₂ - 1 ¹ / ₄	2 - 6	1 ¹ / ₁₆	27	200	91	400	181	Aluminum
MM HRK 365	Carbo-Cam®*	1 ³ / ₃₂	28	2 ⁹ / ₁₆	65	1 ¹ / ₄	32	1.44	42	1 ¹ / ₈ - 3 ³ / ₈	3 - 10	1 ¹ / ₂	38	200	91	500	227	Plastic carbon-matrix
MM HRK 412	Double Cam-Matic®****	2 ¹ / ₁₆	53	3 ¹⁷ / ₃₂	81	1 ¹ / ₄	32	4.50	126	5 ⁵ / ₁₆ - 3 ³ / ₈	8 - 10	2 ⁷ / ₁₆	62	500	227	750	340	Aluminum
MM HRK 471	Micro Carbo-Cam®**	7 ⁷ / ₈	22	1 ⁷ / ₈	48	1 ⁵ / ₁₆	24	0.67	19	1 ¹ / ₈ - 1 ¹ / ₄	3 - 6	1 ¹ / ₁₆	27	150	68	300	136	Plastic carbon-matrix
Trigger Cleat																		
MM HRK 418	Trigger cleat****	1 ³ / ₈	35	2 ¹ / ₂	64	3	76	5.6	159	3 ³ / ₁₆ - 1 ¹ / ₂	5 - 12	2	51	500	227	1000	454	Stainless steel
MM HRK 355	Trigger cleat adaptor plate	1 ¹ / ₄	6	3 ⁹ / ₆₄	79	1 ⁹ / ₃₂	31	1.3	36	—	—	2 ⁵ / ₈	66	—	—	—	—	—

*#10 (5 mm) FH fasteners

**#8 (4 mm) RH fasteners

***1¹/₄" (6 mm) FH fasteners

****#10 (5 mm) TH fasteners

HARKEN®**CAM KITS**

Micro Kits						
Code	Description	Cam	Wedge	Fairlead	Weight	
					oz	g
MM HRK 472	Carbo-Cam®/wedge/wire fairlead	471	297	475	1.2	33
MM HRK 469	Cam-Matic®/wire fairlead	468	—	475	1.2	33
MM HRK 473	Carbo-Cam®/wire fairlead	471	—	475	0.9	26
MM HRK 474	Carbo-Cam®/X-Treme Angle Fairlead	471	—	476	1.7	47
MM HRK 470	Cam-Matic®/X-Treme Angle Fairlead	468	—	476	1.9	55

Standard Kits						
Code	Description	Cam	Wedge	Fairlead	Weight	
					oz	g
MM HRK 326	Carbo-Cam®/wire fairlead	365	—	298	2.00	54
MM HRK 327	Cam-Matic®/wire fairlead	150	—	298	3.00	85
MM HRK 458	Carbo-Cam®/X-Treme Angle Fairlead	365	—	380	3.36	98
MM HRK 459	Cam-Matic®/X-Treme Angle Fairlead	150	—	375	4.42	127

HARKEN®**CAM CLEAT ACCESSORIES**

Code	Description	Height above cam		Height		Length		Width		Weight		Fastener spacing		Fits
		in	mm	in	mm	in	mm	in	mm	oz	g	in	mm	
Micro														
MM HRK 281	Eyestrapp	1/2	12	—	—	17/16	36	7/16	11	.16	4.5	1 1/16	27	468/471
MM HRK 475	Wire fairlead	—	—	15/16	23	17/8	48	15/16	24	.29	8	1 1/16	27	468/471
MM HRK 293	Flat cam riser	—	—	5/8	16	17/8	48	15/16	24	.50	14	1 1/16	27	468/471
MM HRK 294	15° Angled micro cam riser	—	—	3/4	19	17/8	48	15/16	24	.75	21	1 1/16	27	468/471
MM HRK 297	Cam wedge kit	—	—	—	—	17/8	48	15/16	24	.16	5	1 1/16	27	468/471
MM HRK 476	X-Treme Angle Fairlead	7/8	22	17/16	37	15/16	33	2	51	1	29	1 1/16	27	468/471
MM HRK 424	Flairlead‡‡	7/16	11	—	—	15/8	41	5/8	16	.13	3.5	1 1/16	27	468/471
Standard														
MM HRK 137	Eyestrapp	3/4	19	—	—	2	51	9/16	14	.32	9	1 1/2	38	150/365
MM HRK 145	Cam wedge kit	—	—	—	—	29/16	65	1 1/4	32	1.00	28	1 1/2	38	150/365
MM HRK 201	Low-profile eyestrapp	3/8	10	—	—	17/8	48	7/16	11	.16	4.5	1 1/2	38	150/365
MM HRK 295	Flat cam riser	—	—	1	28	29/16	65	1 1/4	32	1.50	38	1 1/2	38	150/365
MM HRK 296	15° Angled cam riser	—	—	1	25	29/16	65	1 1/4	32	1.25	35	1 1/2	38	150/365
MM HRK 298	Wire fairlead	—	—	1 1/4	32	29/16	65	1 1/4	32	.50	14	1 1/2	38	150/365
MM HRK 375	X-Treme Angle Fairlead‡	15/16	24	2 1/4	57	1 13/16	46	29/16	65	1.92	56	1 1/2	38	150
MM HRK 380	X-Treme Angle Fairlead‡	15/16	24	2 3/16	54	1 13/16	46	29/16	65	1.92	56	1 1/2	38	365
MM HRK 425	Flairlead‡‡	5/8	16	—	—	2 1/16	56	1 13/16	21	.25	7	1 1/2	38	150/365
MM HRK 431	Colored cam caps‡‡	blue/yellow/green/black/red												150/468/365/471
MM HRK 438	Cam adapter plate	—	—	9/16	14	3	76	17/16	36	2.50	71	1 1/2	38	150/365
Offshore														
MM HRK 282	Large eyestrapp	15/16	23	—	—	2 13/16	71	3/4	19	.80	23	2 1/16	52	280
MM HRK 283	Offshore cam wedge kit	—	—	—	—	3 3/8	85	1 1/2	38	1.50	43	2 1/16	52	280

‡Max line Ø: 3/8" (10 mm)

‡‡ Indicate color: BL (blue), Y (yellow), G (green), B (black), R (red)

Notes